



Write Prototype Settings

This option is to save any configuration setting permanently in a system.

1. After changing a setting, go to the **Configuration Centre** and choose **Miscellaneous Configuration**.

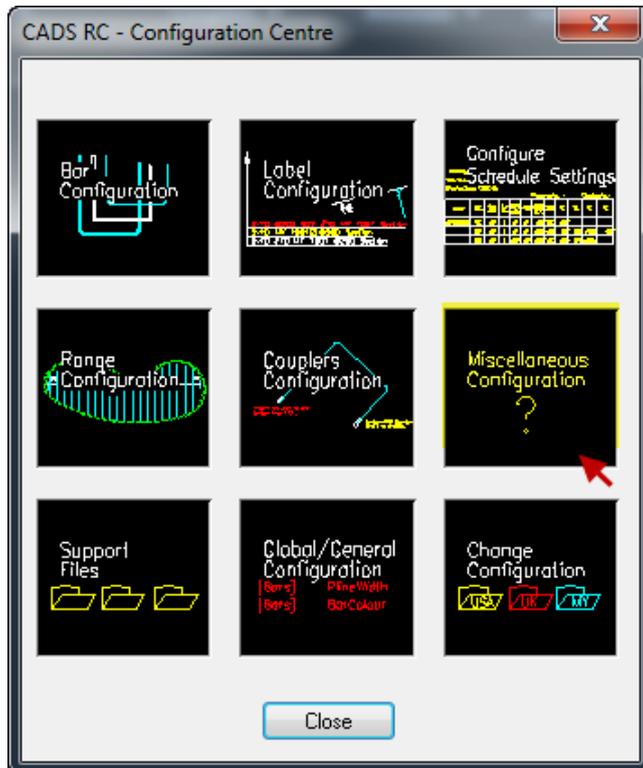

2. Click **Write Prototype Settings**.

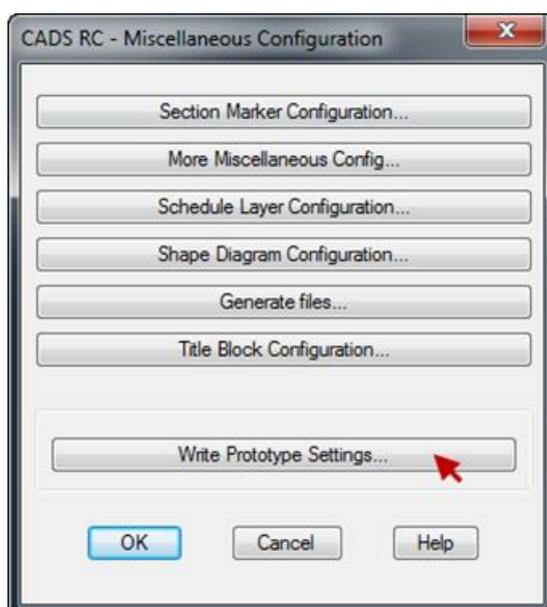


3. Click **Yes**.



This creates an **ini** file and the program will show the file location.

4. Click **OK**.

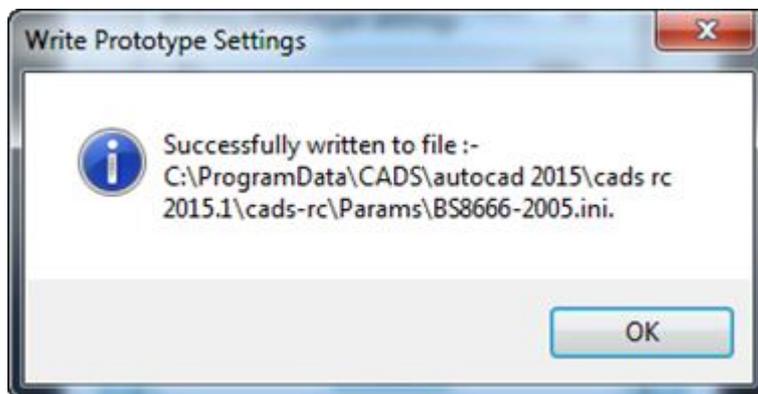

- To apply the same settings in other systems, follow the procedure below.
 - ❖ Copy the **ini** file from the location shown above
 - ❖ Paste the file to the same location in the other system.
- If the settings are applicable for a particular project, a new def file shall be created, following the procedure below.
 - ❖ Change the configuration settings as per project requirement
 - ❖ Create an **ini** file using the **Write Prototype Settings** option.
 - ❖ Copy the **ini** file to a common location or project folder.
 - ❖ Rename the file's extensions from **ini** to **def**.
 - ❖ Load the **def** file using **Change Detailing Standard** option.

